

MARINE PRODUCT DATA SHEET

OEM: 359-101-30 (Bilge Switch)

AFTERMARKET: 359-111-30 (Bilge Switch)

APPLICATION

Bilge water evacuation in conjunction with Bilge Pump

MATERIAL:

Housing: ABS
Switch Type: Mechanical
Leads: 3' Tinned wire

SPECIFICATIONS

Voltage: 12/24V DC
Max-Amps: 12 amps at 12V, 6 amps at 24V
Temp: 33°F to 180°F
Operation: Activates at 1-3/4". Turns Off at 3/4"

APPROVALS

Ignition Protected 8846, CE

WARRANTY

3 Year Limited Warranty. Contact SHURflo for details

SHIPPING

Net Weight (boxed): 0.4Lbs [0.18 Kg] each
Carton Weight: Lb [Kg]
Switches in Carton: 24
Carton Size: 23"L x 17"W x 18" H
[58cm x 43cm x 20cm]


RELATED DOCUMENTS

Catalog: MS-030-140
Installation Manual: 911-1004
Applications Spec Guide: MS-020-005
Warranty: SB-1050



The SHURflo Series float switches provide the ultimate in reliability for your boat. Complete line includes a solid state control, mechanical, standard float switch and protected cage switch.

No Parts Kits Available

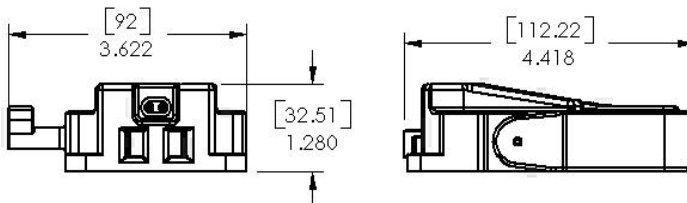

Visit our Web Site at <http://www.shurflo.com>
Shurflo reserves the right to update specifications,
change prices, or make substitutions without notice.

SHURflo
5900 Katella Avenue
Cypress, CA 90630
Phone (562) 795-5200
Toll Free (800) 854-3218
Fax (562) 795-7564

SHURflo East
52748 Park Six Court
Elkhart, IN 46514-5427
Phone (562) 795-5200
Toll Free (800) 854-3218
Fax (574) 264-2169

SHURflo Europe, Middle East, Africa
Pentair Water Belgium bvba
Industriepark Wolfstee, Toekomstlann 30
B-2200 Herentals, Belgium
Phone +32-14-283500
Fax +32-14-283505



Pentair Water

FLOW TECHNOLOGIES GROUP

5900 Katella Ave, Cypress, CA 90630
Phone (800) 854-3218 • (562) 795-5200 • Fax (562) 795-7564
www.shurflo.com